



PC1604

Zn/MnO₂

Alkaline-Manganese Dioxide Battery


mm	Inches
48.50	1.909
46.50	1.831
46.40	1.827
26.50	1.043
24.50	0.965
17.50	0.689
15.50	0.610
12.95	0.510
12.45	0.490

Dimensions shown are IEC/ANSI standards

SPECIFICATIONS

Nominal Voltage:	9.0 V
Rated Capacity:	580 mAh at 620 Ω to 4.8 V at 21°C (70°F)
Nominal Weight:	45.9 g (1.62 oz.)
Nominal Volume:	22.8 cm ³ (1.39 in. ³)
Terminals:	Miniature Snap
Operating Temp. Range:	-20°C to 54°C (-4°F to 130°F)
NEDA:	1604 A
ANSI:	1604 A
IEC:	6LR61
Military:	BA-3090/U

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

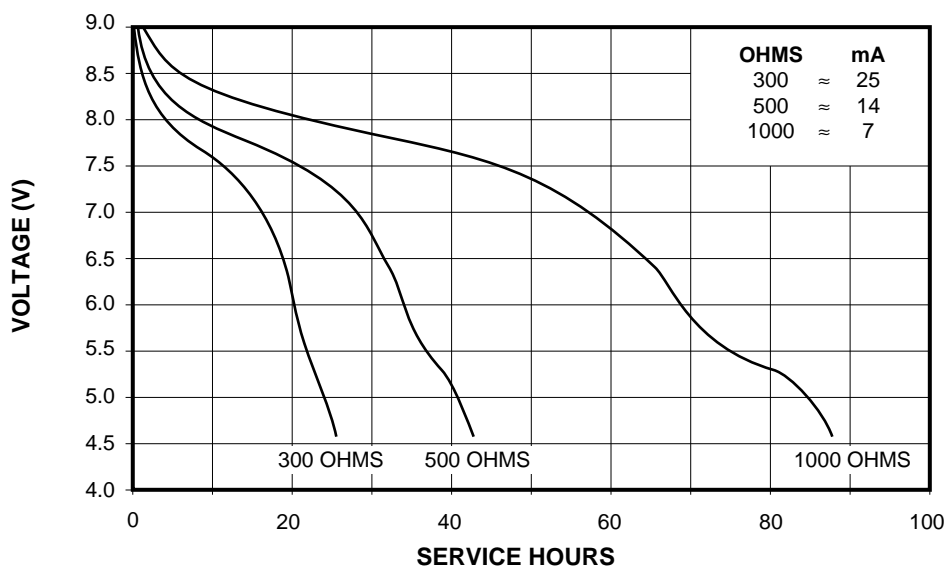

DURACELL INC.

New Products and Technology Division
 Berkshire Corporate Park
 Bethel, CT 06801 U.S.A.
 Telephone: Toll-free 1-800-431-2656
 Outside North America: 203-791-3274
 Facsimile: 203-791-3273
 Internet: www.duracell.com/procell

This data sheet is under document control and is therefore subject to change. Contact Duracell for the latest information.

